

14x51mm Photovoltaic Fuse Links for Solar Panel Applications

15 to 32A, 1000 & 1100Vdc Solar PV Series

RoHS
2002/95/EC



Catalogue Symbol:	PV-(amp rating)A14F
Class of Operation:	gPV and UL PV fuse links
Fuse Size:	14x51mm
Fuse Holders:	CHPV141G (Coming soon) CHPV141GI (Coming soon)
Standards/Approvals:	IEC 60269-6, RoHS compliant

Description: A range of 14 x 51mm package fuse links specifically designed for protecting and isolating photovoltaic strings. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Packaging: MOQ: 10
Packaging 100% recyclable


Technical Data:
Ratings: 1000Vdc (25 & 32A)
1100Vdc (15 & 20A)

Rated Breaking Capacity: 10kA

PV Fuse Coordination w/: Thin film cells and 4", 5" and 6" crystalline silicon cells

Time Constant: 1-3ms

Dimensions - mm

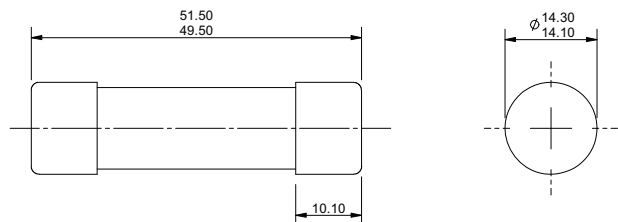

14x51mm Photovoltaic Fuse Links for Solar Panel Applications


15 to 32A, 1000 & 1100Vdc Solar PV Series

RoHS
2002/95/EC

Technical Data

Part Number	Current Rating (Amps)	Rated Voltage	Energy Integrals I^2t (A ² s)		Watts Loss	
			Pre-Arcing	Total at Rated Voltage	0.8 I_n	I_n
PV-15A14F	15	1100Vdc	14	265	2.1	4
PV-20A14F	20		27	568	2.7	5
PV-25A14F	25	1000Vdc	65	943	2.7	5.1
PV-32A10F	32		120	1740	3.3	6.2

Time-Current Characteristics

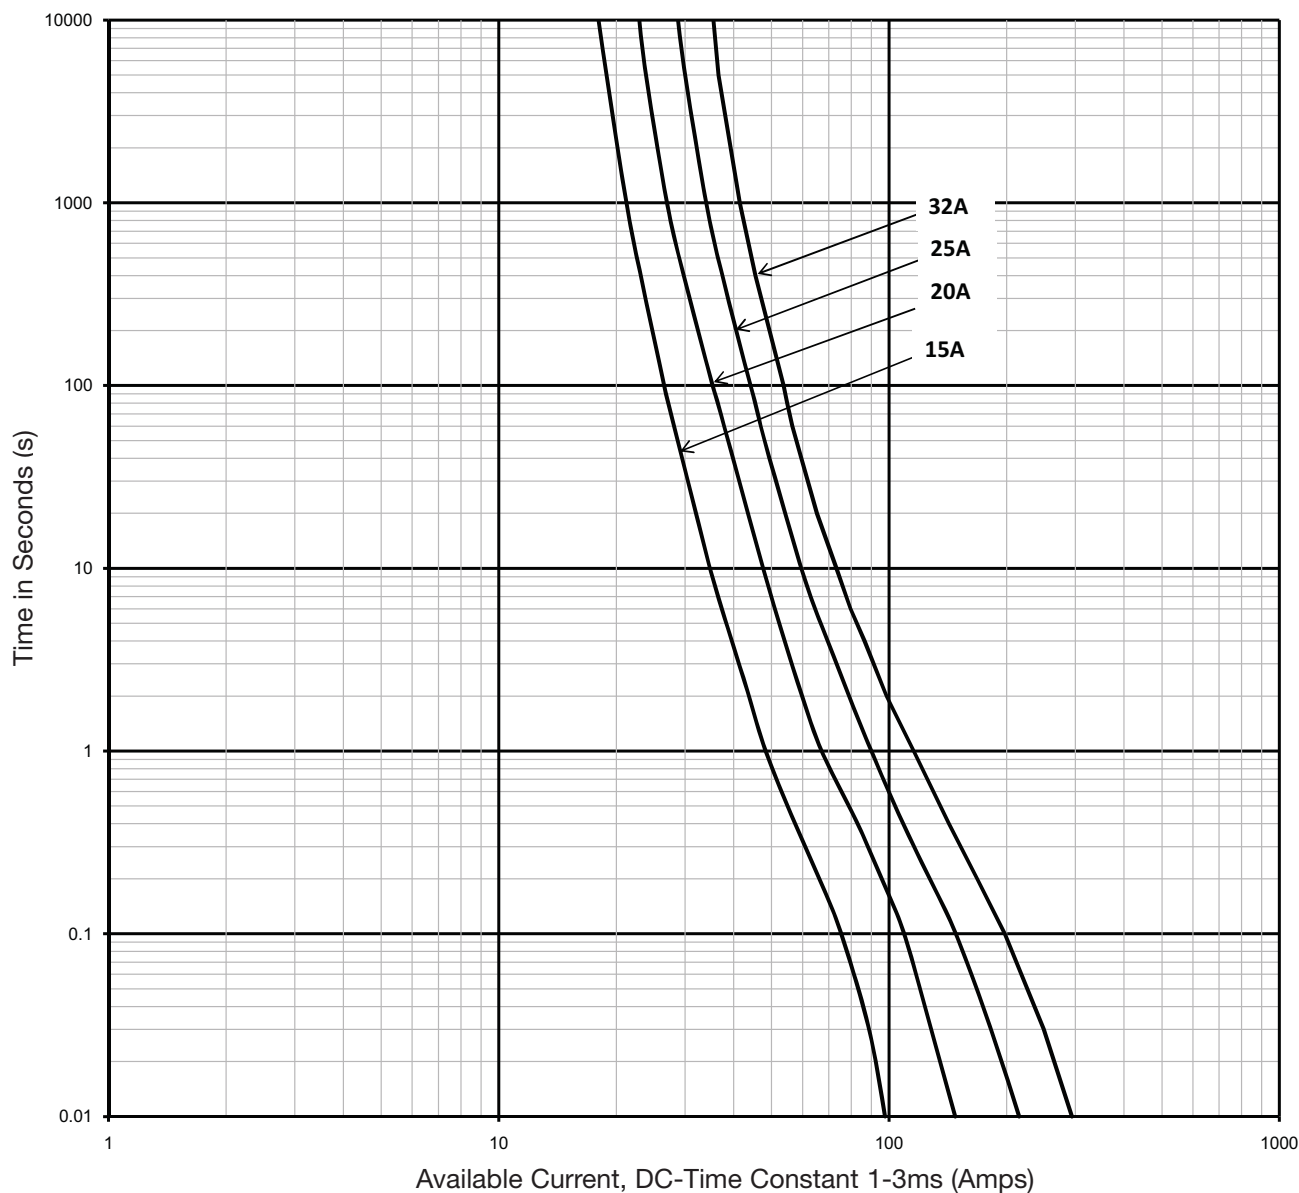

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.